

2061 HF Phone patch



The Barrett 2061 HF phone patch provides an interface between an HF network and the International telephone network, allowing HF stations to be connected to telephone subscribers and vice versa.

The Barrett 2061 uses a unique adaptive hybrid to convert the four-wire audio from the transceiver to two-wire audio for the phone line. An adaptable hybrid, implemented with digital signal processing (DSP), provides continually recalculated isolation between the off air HF signal and the telephone user, producing a reliable VOX signal (Voice Operated Xmit (transmit)) to key the transmitter when the telephone subscriber's voice is present.

The 2061 is packaged in a 2000 series enclosure and is designed for direct interface via our standard bus cable to the Barrett 2050 transceiver. It can however be interfaced to other suitable HF transceivers.


Features

DSP based automatic adaptive hybrid that balances the telephone line continually with no adjustments, eliminating oscillation in full duplex circuits, false VOX tripping and time consuming setup.

Designed for full-duplex, half-duplex, or simplex operation.

Compact desk-top package.

Built-in speaker with volume control to monitor call progress.

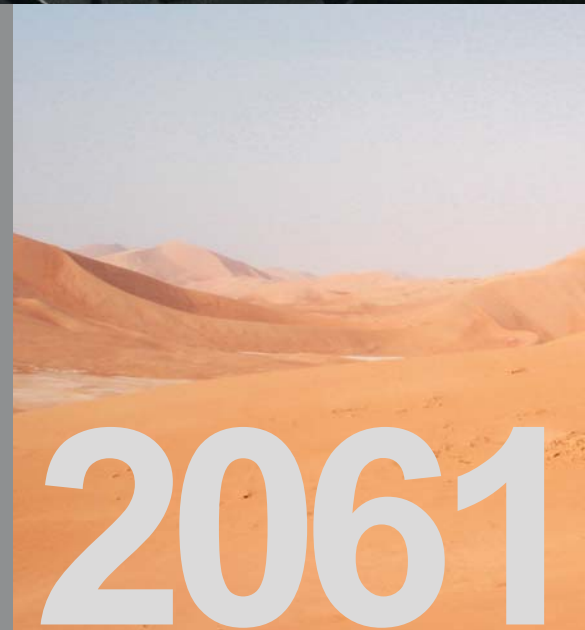

HF Radio Communications

2061 HF Phone patch

Specifications

Output level to phone line	Nominally 0 dBm
Input level from phone line	Nominally 0 dBm
Frequency response	300 to 3000 Hz \pm 2 dB
Output impedance to phone line	600 Ω
VOX sensitivity	Adjustable internally
VOX hang time	0.5 seconds
Ultimate hybrid balance	-50 dB measured with a single tone

Transceiver interface

Rx audio input	Balanced 600 Ω @ 0 dBm
Tx audio output	Balanced 600 Ω @ 0 dBm
Frequency response	300 to 3200 Hz \pm 2 dB
VOX key output	Open collector
Switching speed	5 mS

General

Telephone line connector	RJ-11C
Local telephone set connections	RJ-11C
Connector to transceiver	DB-25
Indicators	"CONNECT" "OPERATOR OVERRIDE"

Front panel controls

	"CONNECT" "DISCONNECT" "OPERATOR OVERRIDE"
--	--

Rear panel control

Input power	Monitor volume control +11 to +15 VDC (12 VDC nominal)
Input current	80 mA @ +12.6 VDC input
Size	185(w) x 270(d) x 70(h) (2000 series standard enclosure)


Weight

0.8 kg


Environmental

Operating temperature	-20°C to +55°C
Storage temperature	-40°C to +85°C
Humidity	Up to 95% @ 55°C
Shock	MIL-STD 810D method 516.3 procedure VI
Vibration	MIL-STD 810D method 514.3 Category


Network example

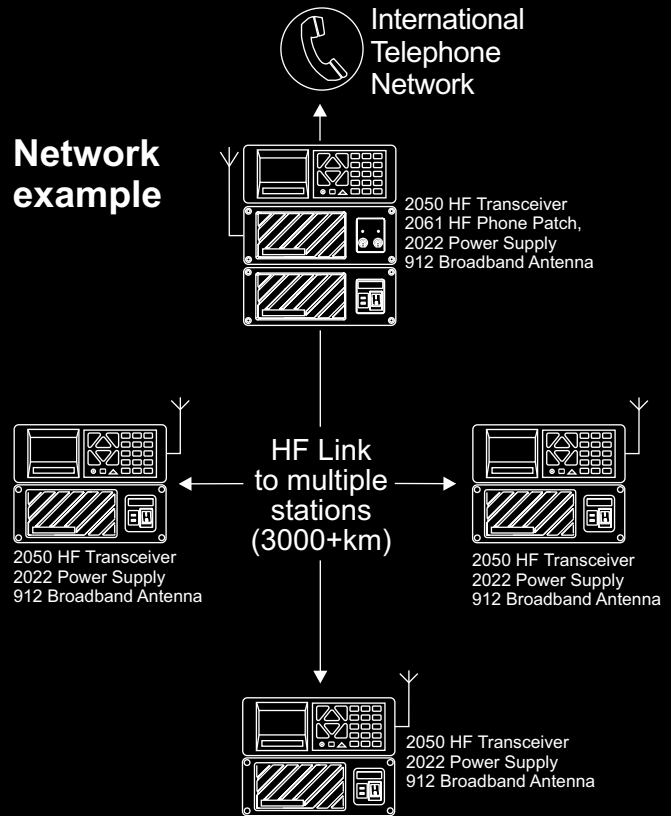


2061 Phone patch front

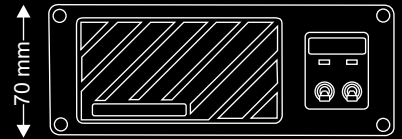

2061 Phone patch top

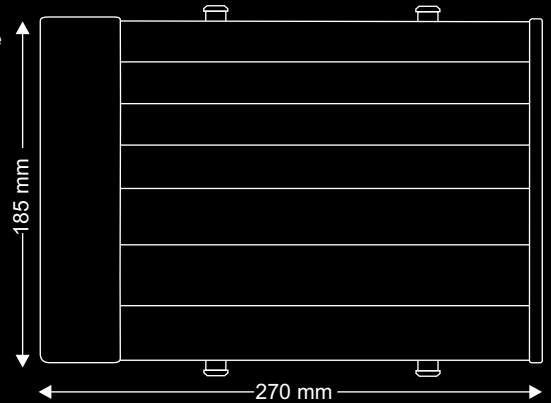

2061 Phone patch side

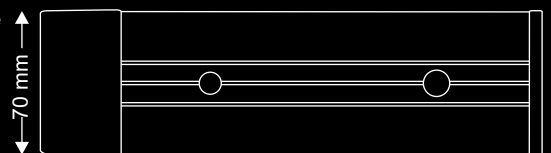

Barrett 2061 HF Phone patch rear panel

Head Office:

Barrett Communications Pty Ltd
P O Box 1214, Bibra Lake WA 6965 AUSTRALIA
Toll Free Tel: 1800 999 580 Tel: +618 9434 1700 Fax: +618 9418 6757
email: information@barrettcommunications.com.au

Americas Office:

Barrett USA LLC 15941 W. 65th Street
Suite 373, Shawnee, Kansas 66217 USA
Tel: +1 913 671 9068
email: information@barrettusa.com

European Office:

Barrett Europe Limited, Unit 9, Fulcrum 2, Victory Park,
Solent Way, Whiteley,
PO15 7FN UNITED KINGDOM
Tel: +44 1489 880332
Fax: +44 1489 565422
email: information@barretteurope.co.uk