

# 2017 Automatic tuning horizontal dipole



The Barrett 2017 Automatic tuning horizontal dipole is designed for base station applications where space is at a premium but high performance is still required.

Mounting on a standard 50 mm pole the Barrett Automatic tuning horizontal dipole can be mounted as close as 6 metres from the ground making it extremely easy to install.

With a packed length of only 2.1 metres the antenna can be easily transported by air.


The integral receive preamp provides impedance matching during scan mode operation for reliable scanning and link establishment operation using modern radio protocols.

The tuner has a memory system that stores tuning information for each channel after an initial tune sequence.

Assembly fixtures are supplied to assist in mounting the antenna to an existing mast, tower or pole. Alternatively a range of suitable masts can be supplied with the antenna.

The Barrett 2017 is supplied standard with a 30 metre composite control, RF cable and connectors to interface with Barrett 2050 transceivers.

Radiation patterns provided are tested at 10 metres but will vary depending on the mounted height of the antenna.

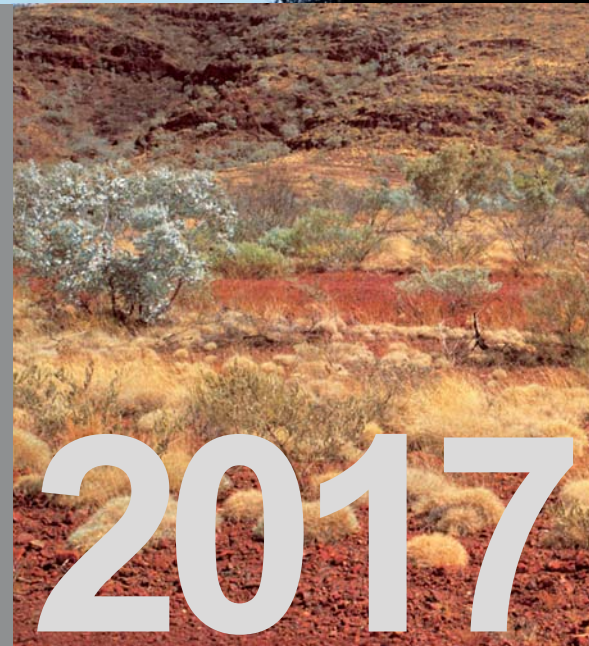

# HF Radio Communications

## 2017 Automatic tuning horizontal dipole


### Features

- 3 to 30 MHz frequency coverage
- Efficient – tuned on each frequency
- Simple installation in space restricted areas
- Broadband amplifier in receive mode
- Memory tuning – less than 10 mS



### Specifications

Frequency range	3 to 30 MHz
VSWR	1.5:1
Polarisation	Horizontal
Impedance	50 ohms
Power input	200 W PEP maximum
Width deployed	8 metres
Input impedance range	45 to 55 ohms
VSWR: (typical)	Typically less than 1.4:1
DC input requirements	+13.8 V DC (Derived from 2000 series transceiver via integral RF control cable)
DC operating range	+10 to 15 V DC
Input current average	0.9 Amps
Tuning time - first tune	Less than 2 seconds - typical
Tuning time - from memory	Less than 10 mS - typical
Memory addresses	170
Operating temperature	-35°C to +70°C
Antenna weight (total)	10 kg

### Dimensions

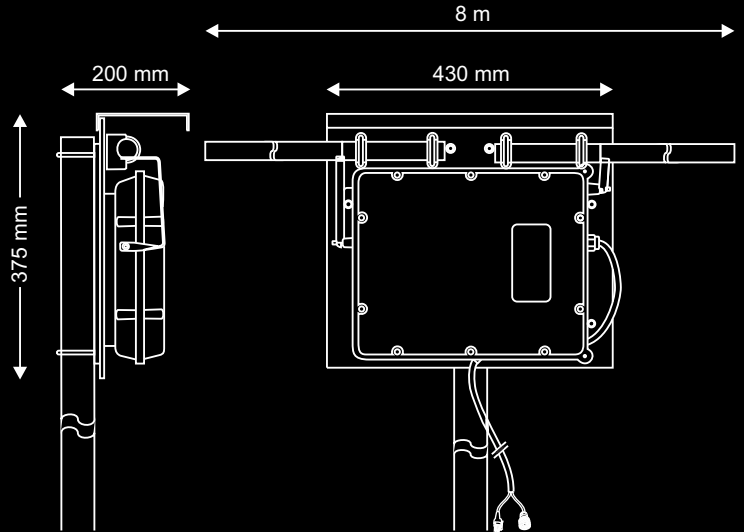

### Radiation pattern

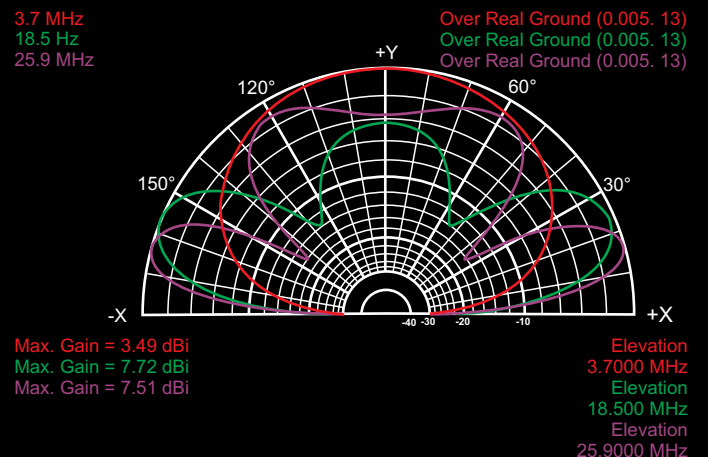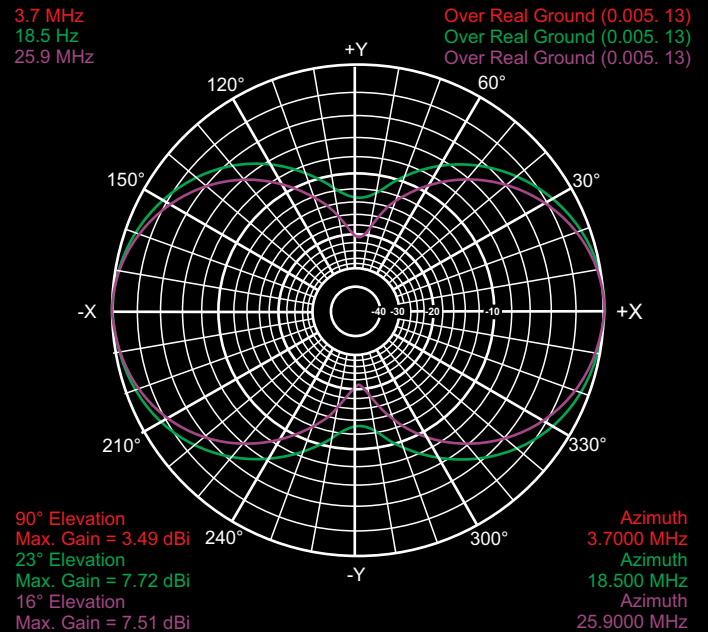

**Head Office:**  
 Barrett Communications Pty Ltd  
 PO Box 1214, Bibra Lake WA 6965 AUSTRALIA  
 Toll Free Tel: 1800 999 580 Tel: +618 9434 1700 Fax: +618 9418 6757  
 email: information@barrettcommunications.com.au

**European Office:**  
 Barrett Europe Limited, Unit 9, Fulcrum 2, Victory Park,  
 Solent Way, Whiteley,  
 PO15 7FN UNITED KINGDOM  
 Tel: +44 1489 880332  
 Fax: +44 1489 565422  
 email: information@barretteurope.co.uk

**Americas Office:**  
 Barrett USA LLC 15941 W. 65th Street  
 Suite 373, Shawnee, Kansas 66217 USA  
 Tel: +1 913 671 9068  
 email: information@barrettusa.com

